


OFFICE OF THE MARION COUNTY SURVEYOR
 SECTION RECORD CORNER
 SECTION 31 TOWNSHIP 17 RANGE 4
 DATE: -7-10-99- 1-04-05
 PARTY CHIEF: Wilcoxon
 CREW: _____
 TYPE OF MARKER: Harrison
 METHOD OF ESTABLISHMENT: County: 2-18-99

IN. S.P.C. E ZONE, NAD 83
 NAME: 17043105
 N: 513844.0304(m)
 E: 61441.8810(m)

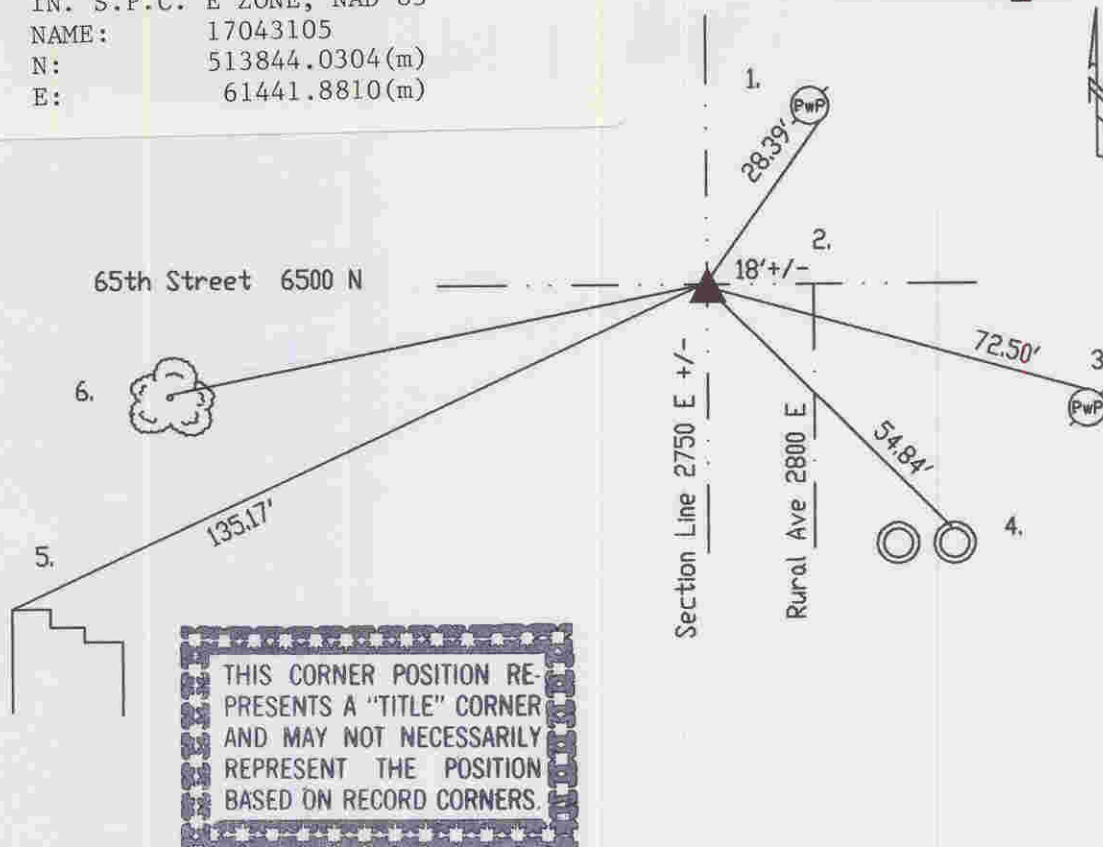

THIS CORNER POSITION REPRESENTS A "TITLE" CORNER AND MAY NOT NECESSARILY REPRESENT THE POSITION BASED ON RECORD CORNERS.

A survey by D.W. Voorhis on July 21, 1863 indicates a set rock with no witnesses per Washington Township Legal Survey Book pg. 83, MCSO 10-20-43 called a stone. Wilcoxon 4-27-76 called a railroad spike. Wilcoxon 3-26-84 called a stone found with guard pin 18' down. Wilcoxon 11-30-88 called a 5/8 inch iron rod found. Wilcoxon 2-18-99 called a PK nail found. Excavated 6-26-99 by Wilcoxon and a mag nail was found 3' down. Rebar was found 7' down under the mag nail. A stone with guard pin was found 24' down. Harrison was set on top of the stone.

HC743105

REF.	DISTANCE	DESCRIPTION
1.	28.39'	Mag nail w/brass washer SE PwP#387-270 12'up
2.	18.00'	Due E to approximate C/L of Rural
3.	72.50'	PK nail N PwP no# 6'up
4.	54.84'	Cut 'x' most easterly 'bell telephone manhole'
5.	135.17'	NW corner of brick
6.	104.90'	Mag nail w/brass washer N 20' ash 3'up